


Cook & Hold Oven

Model 1750-TH








DIMENSIONS

OVERALL HEIGHT: 1750-TH	
Accessory	mm
127mm caster	1474
89mm caster	1448
152mm leg (min)	1420
152mm leg (max)	1477
152mm seismic leg (min)	1444
152mm seismic leg (max)	1506

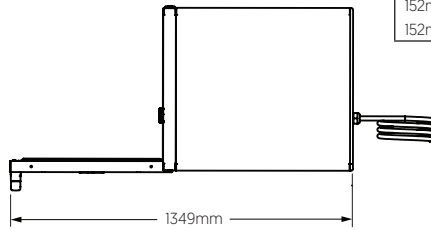

Shown with Simple control and 89mm casters

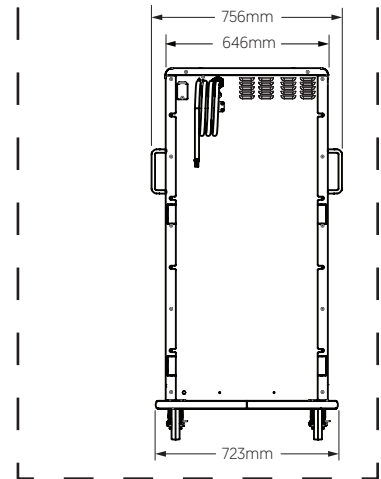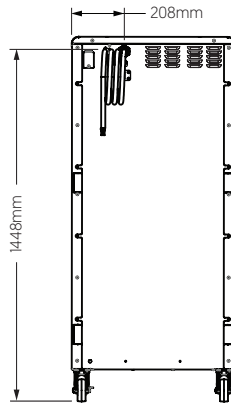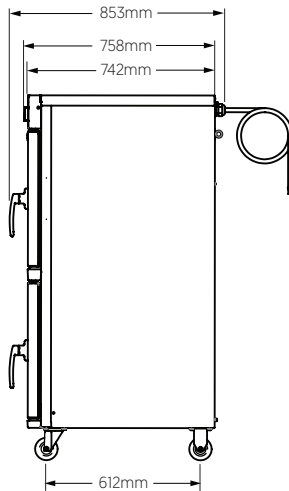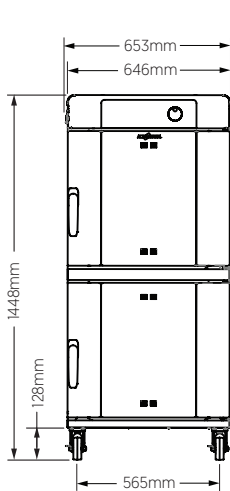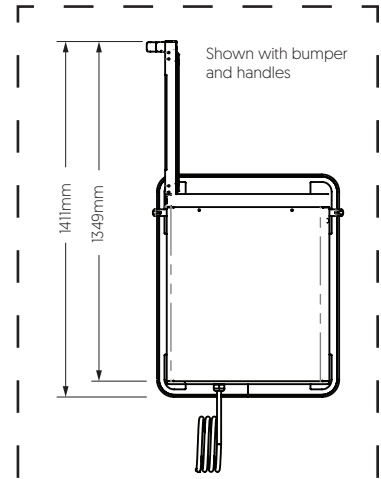

Interior (H x W x D) Per Cavity	Net Weight	Ship Dimensions (L x W x H)	Ship Weight
510mm x 559mm x 673mm	200 kg	991mm x 991mm x 2007mm	240 kg



CLEARANCE

- Top: 51mm
- Left: 51mm
- Right: 51mm
- Back: 76mm



CHECK FIRST

The oven must be installed level.

The oven must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Cook & Hold Oven

Model 1750-TH



Heat of rejection

1750-TH	Heat Gain qs, BTU/hr	Heat Gain qs, kW
	1,825	0.53



Cooking temperature range:

94°C–163°C

Holding temperature range:

29°C–96°C



1750-TH	V	Ph	Hz	Awg	IEC	A	Breaker (A)	kW	Plug Configuration	Certification	
208–240V**	208	1	60	8	—	29	30 UL 50 CSA	6.3	Alto-Shaam offers a number of readily available cord and plug configurations. Contact factory for options.		
	240	1	60	8	—	35	50	8.3			
230V	230	1	50/60	8	—	33	63	7.6			
	230	1	50/60	8	—	22	32	5.1*			
380–415V	380	3	50/60	10	2.5	18	32	7.0			
	415	3	50/60	10	2.5	20	32	8.2			

Electrical connections must meet all applicable federal, state, and local codes.

*Reduced wattage configuration.

**Dedicated circuit required.

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
 Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com