


Cook & Hold Oven

Model 1750-SK

ALTO-SHAAM.







DIMENSIONS

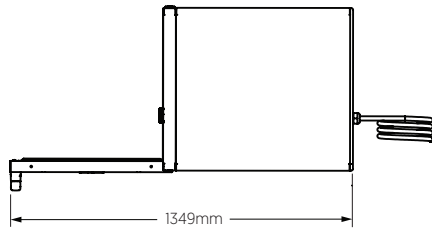


OVERALL HEIGHT: 1750-SK	
Accessory	mm
127mm caster	1474
89mm caster	1448
152mm leg (min)	1420
152mm leg (max)	1477
152mm seismic leg (min)	1444
152mm seismic leg (max)	1506

Shown with Simple control and 89mm casters

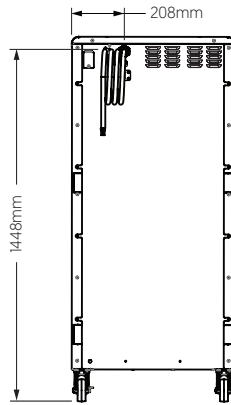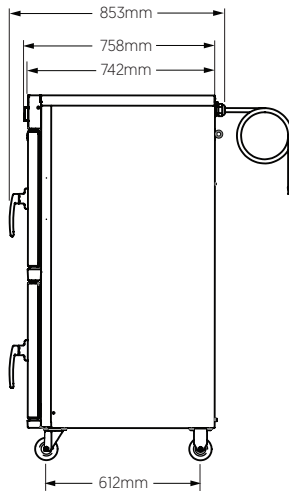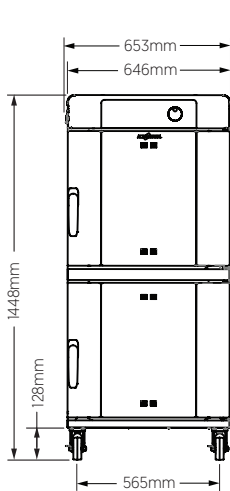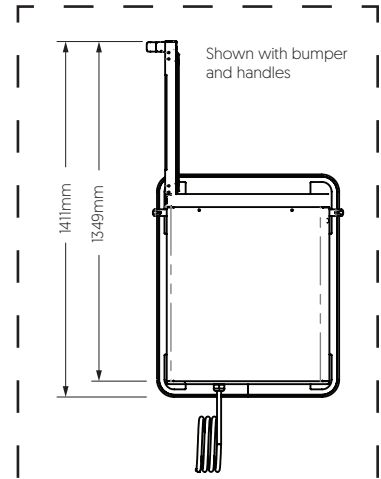

1448mm

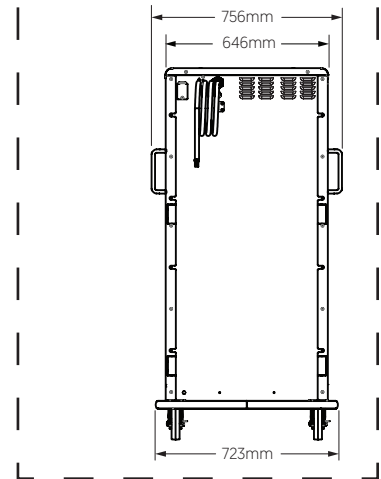

Interior (H x W x D) Per Cavity	Net Weight	Ship Dimensions (L x W x H)	Ship Weight
510mm x 559mm x 673mm	200 kg	991mm x 991mm x 2007mm	240 kg



CLEARANCE

Top: 51mm
 Left: 51mm
 Right: 51mm
 Back: 76mm



CHECK FIRST

The oven must be installed level.

The oven must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

See local installation codes for smoker ventilation requirements.

Cook & Hold Oven

Model 1750-SK



Heat of rejection

1750-TH	Heat Gain qs, BTU/hr	Heat Gain qs, kW
	1,825	0.53



Cooking temperature range:

94°C–163°C

Holding temperature range:

29°C–96°C



1750-SK Smoker

1750-SK	V	Ph	Hz	Awg	IEC	A	Breaker (A)	kW	Plug Configuration	Certification	
208–240V**	208	1	60	8	—	33	50	7.0	Alto-Shaam offers a number of readily available cord and plug configurations. Contact factory for options.		
	240	1	60	8	—	38	50	9.0			
230V	230	1	50/60	8	—	36	63	8.3			
	230	1	50/60	8	—	25	32	5.8*			
380-415V	380	3	50/60	10	2.5	20	32	7.6			
	415	3	50/60	10	2.5	22	32	8.9			

Electrical connections must meet all applicable federal, state, and local codes.

*Reduced wattage configuration.

** Dedicated circuit required.

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
 Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com